




# SAVVY TREND Analysis


## N343TX · SR22T Turbo (Continental) · TSIO-550 ·

Includes 52 flights between Oct 05, 2022 and Oct 05, 2023, compared with 74765 flights by a cohort of 815 SR22T Turbo (Continental) aircraft.

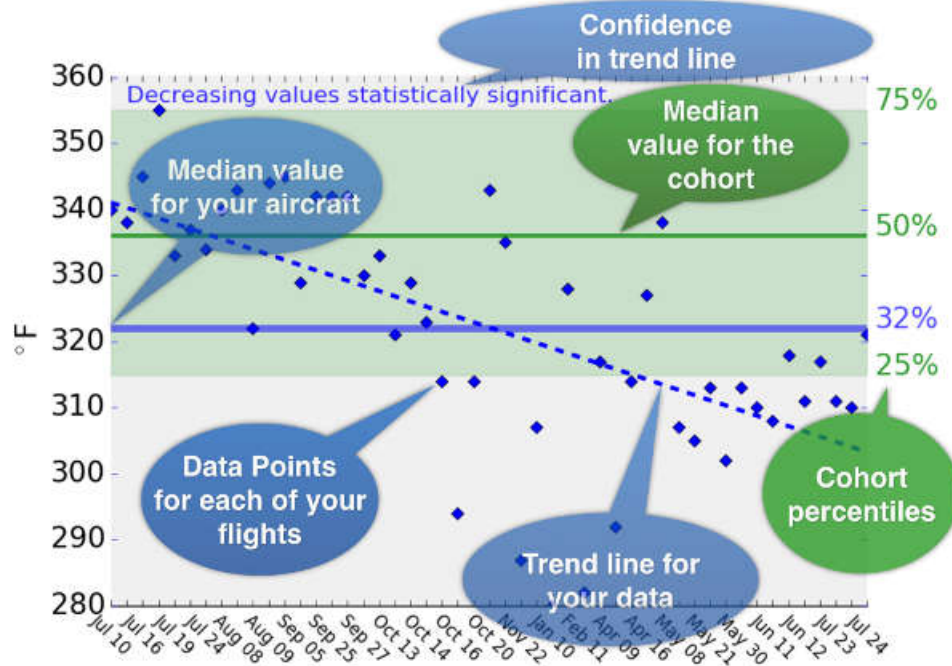

## PERCENT POWER IN CRUISE

Measures your engine's power output during cruise flight. High power output for extended periods can contribute to reduced fuel efficiency, elevated CHT and reduced cylinder life.

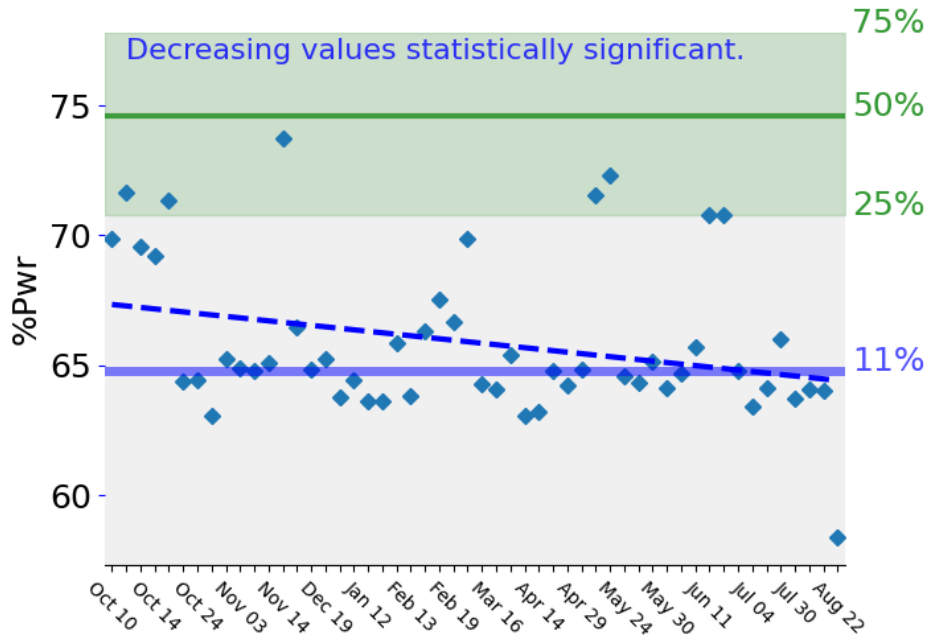


### SAVVY SAYS...

The median of your engine's power output during cruise flights is lower than 89% of the cohort, contributing to longer than average cylinder life.

### ALTITUDE IN CRUISE (MSL)

Measures the altitude during the cruise phase of flight. For turbocharged aircraft, higher altitudes generally provide better performance and efficiency.

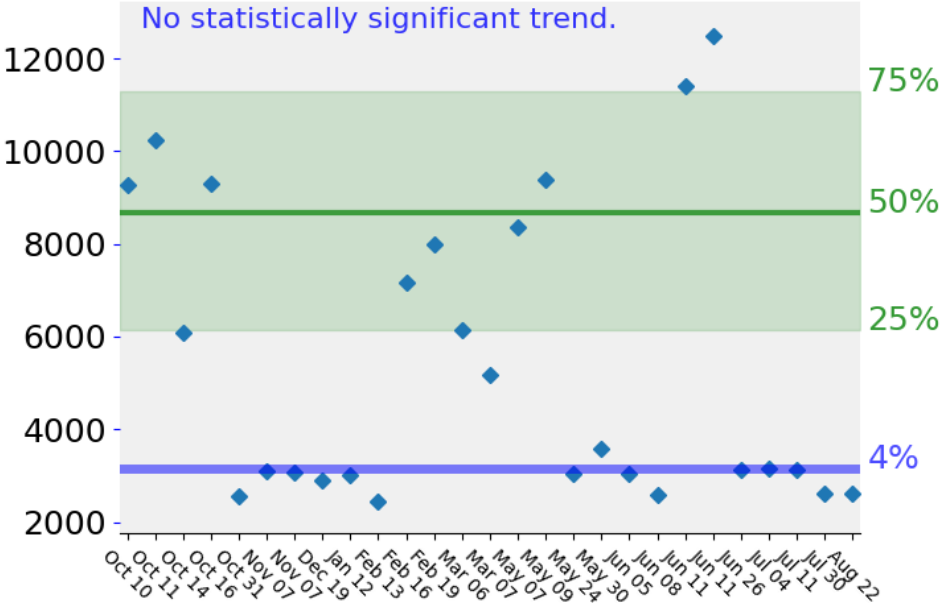


### SAVVY SAYS...

Your cruising altitudes tend to be low, resulting in reduced fuel efficiency and performance.

**SPEED IN CRUISE (K.)**

We use TAS if available, otherwise ground speed. Higher speed might be due to high power output, resulting in high CHT and reduced cylinder life. Or possibly operation at higher, more efficient altitudes.

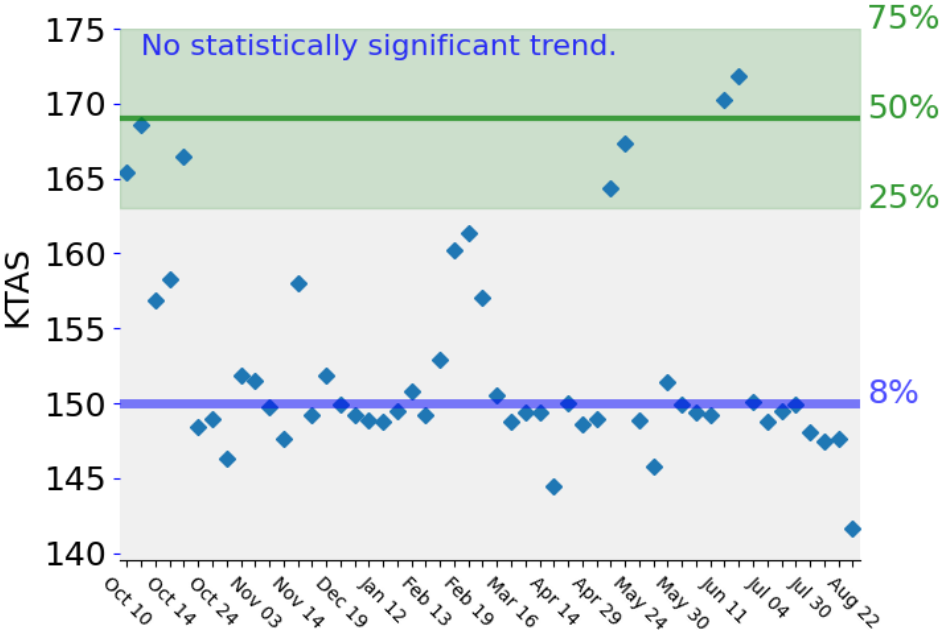


**SAVVY SAYS...**

Your cruise speed is below average when compared with your cohort.

**FUEL EFFICIENCY (NM PER GAL.)**

Measures your aircraft's fuel efficiency during cruise flight.

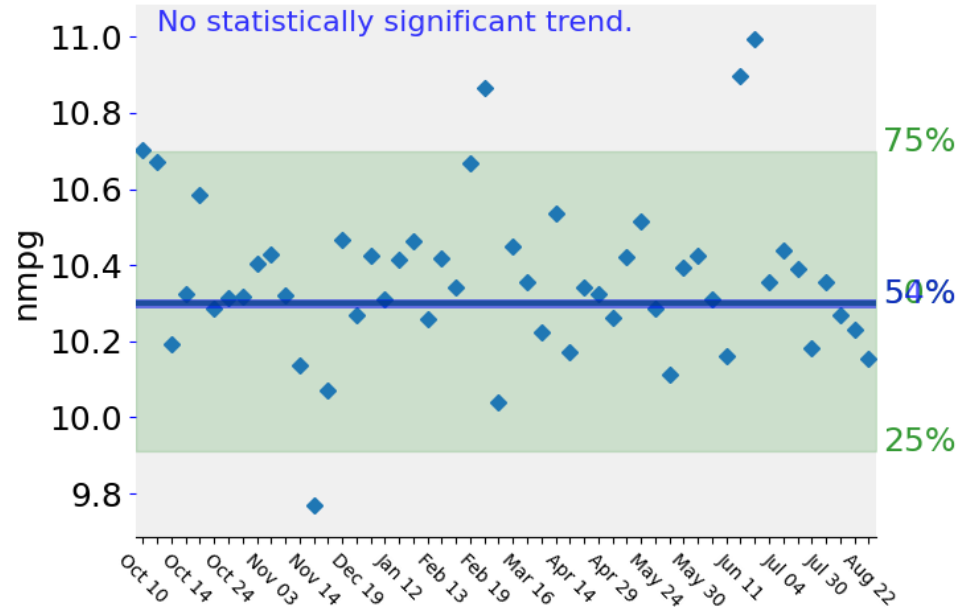


**SAVVY SAYS...**

Your aircraft's fuel efficiency is average when compared to your cohort.

## MAXIMUM CHT DURING FLIGHT (DEG. F.)

Measures the maximum CHT attained during each flight, most likely during climb phase. Prolonged periods of high CHT can contribute to reduced cylinder life.

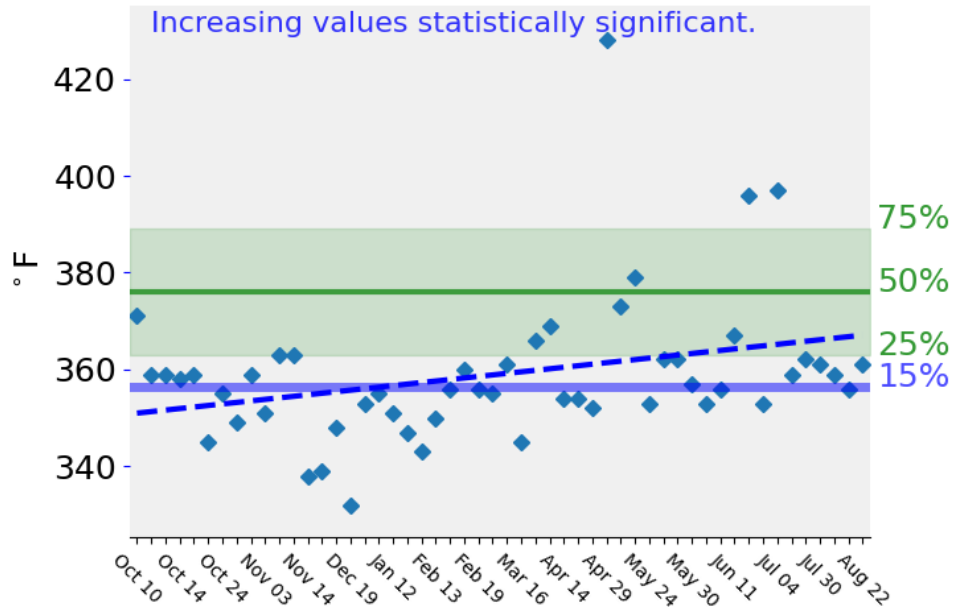


### SAVVY SAYS...

Outstanding! The maximum CHTs attained during your flights has been exceptionally low, with a median lower than 85% of the cohort. We think you can expect above-average longevity of your cylinders if you continue operating with your current power settings. Keep doing what you're doing!

## MAXIMUM CHT IN CRUISE (DEG. F.)

Measures the maximum cylinder head temperature (CHT) during the cruise phase of flight, an indication of the stress placed on your engine's reciprocating components. High CHT correlates with reduced longevity of cylinder assemblies.

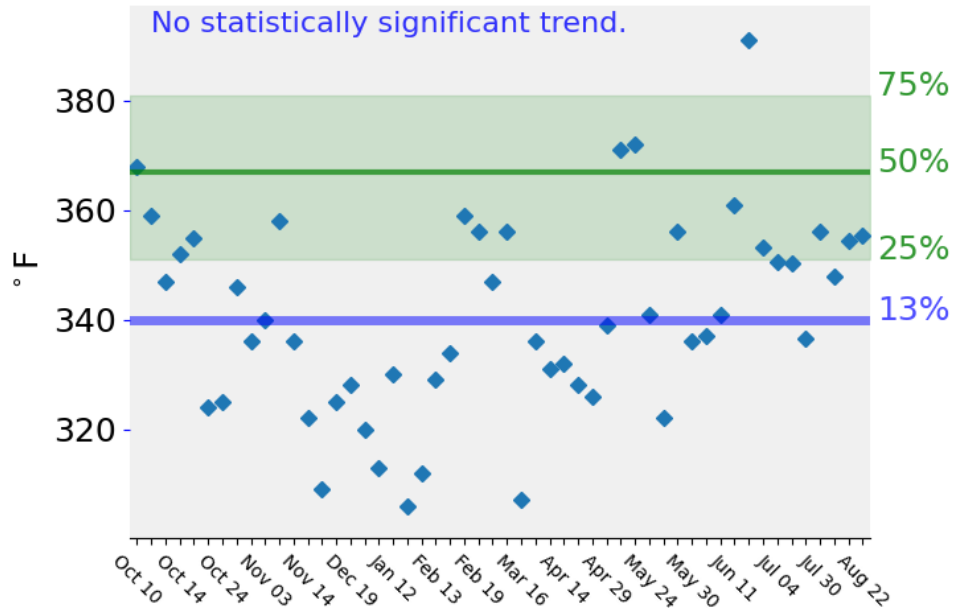


### SAVVY SAYS...

Outstanding! Your cruise CHTs have been exceptionally low, with a median value lower than 87% of the cohort. We think you can expect above-average longevity of your cylinders if you continue operating with your current leaning procedures and/or power settings. Keep doing what you're doing!

---

## MAXIMUM CHT SPREAD IN CRUISE (DEG. F.)

Measures the median temperature spread between your hottest and coolest cylinders at maximum CHT during cruise. The spread is an indication of mixture distribution and the adequacy of cooling airflow to all cylinders.

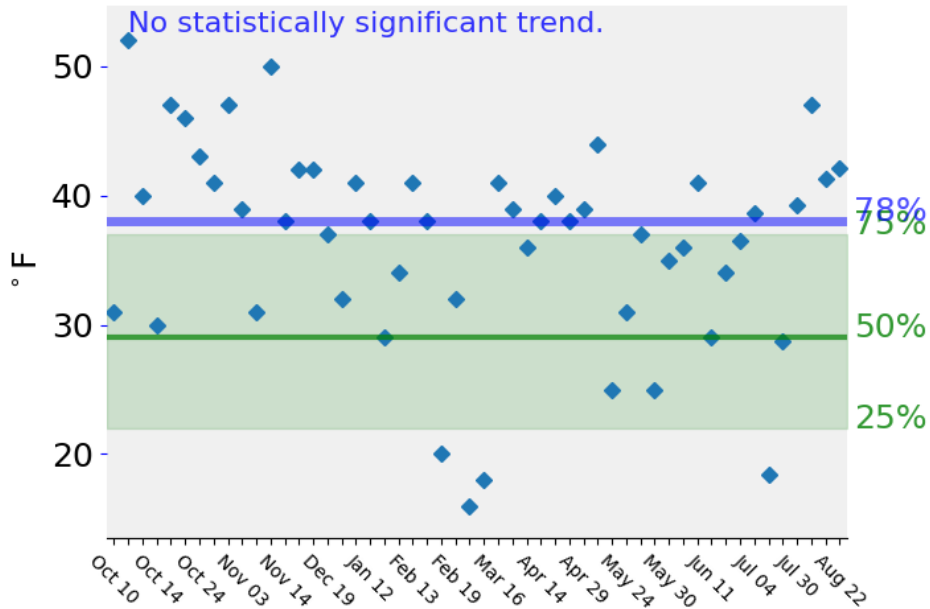


### SAVVY SAYS...

The median value of the maximum CHT spread during cruise flights is higher than 78% of the cohort.



### OIL PRESSURE IN CRUISE (PSI)

Measures the average oil pressures during cruise for your flights.

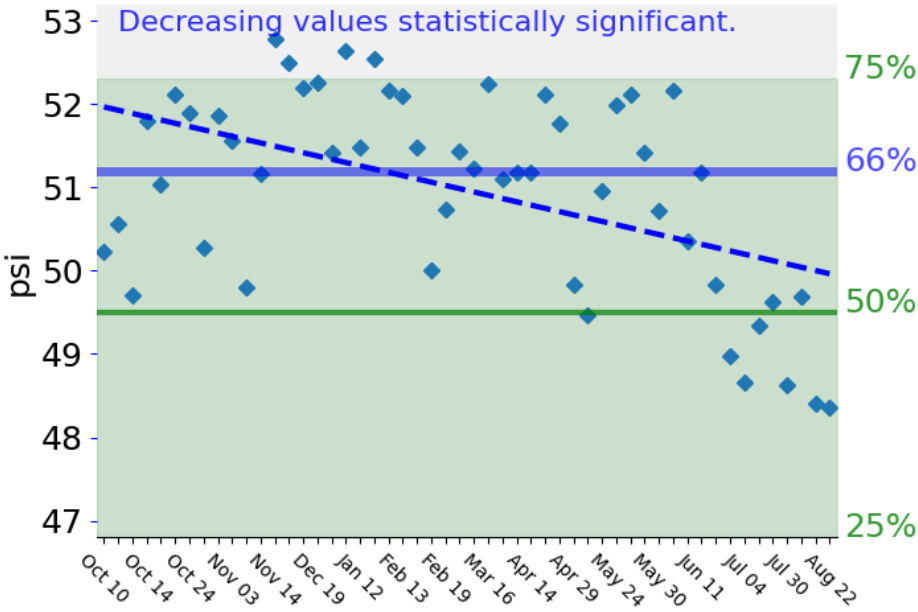


### SAVVY SAYS...

Your average oil pressures during cruise have a median value in the mid-range of the cohort. Your oil pressures are in the normal range.

# OIL TEMPERATURE IN CRUISE

Measures average oil temperature during cruise.

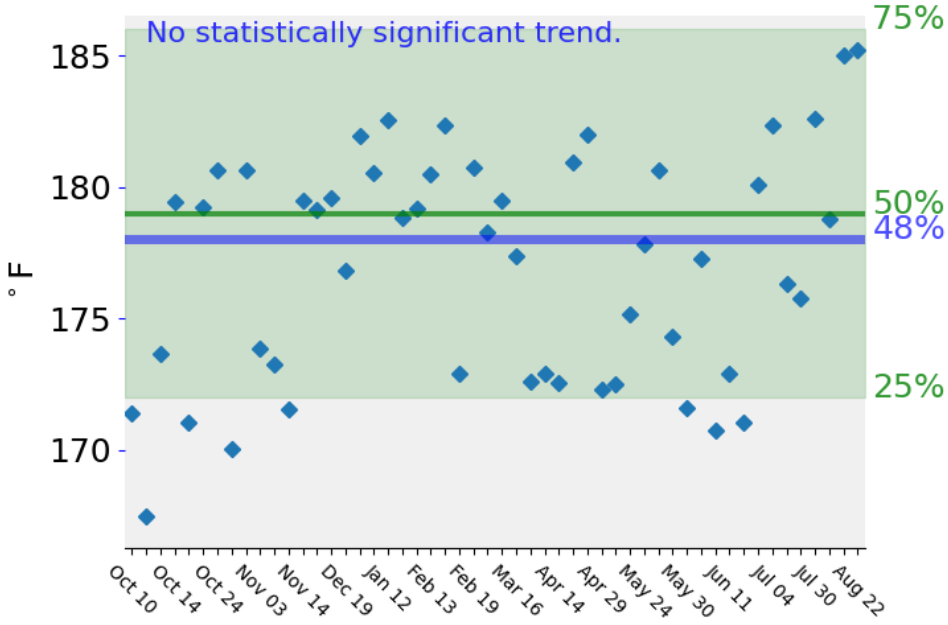


## SAVVY SAYS...

The median of your average oil temperatures during cruise are about average when compared with the cohort. Your oil temperatures are in the normal range.

---

## MAXIMUM FUEL FLOW DURING FLIGHT

Measures maximum fuel flow during flight, most likely during takeoff. Sufficient fuel flow is important for proper cylinder cooling during high power operations

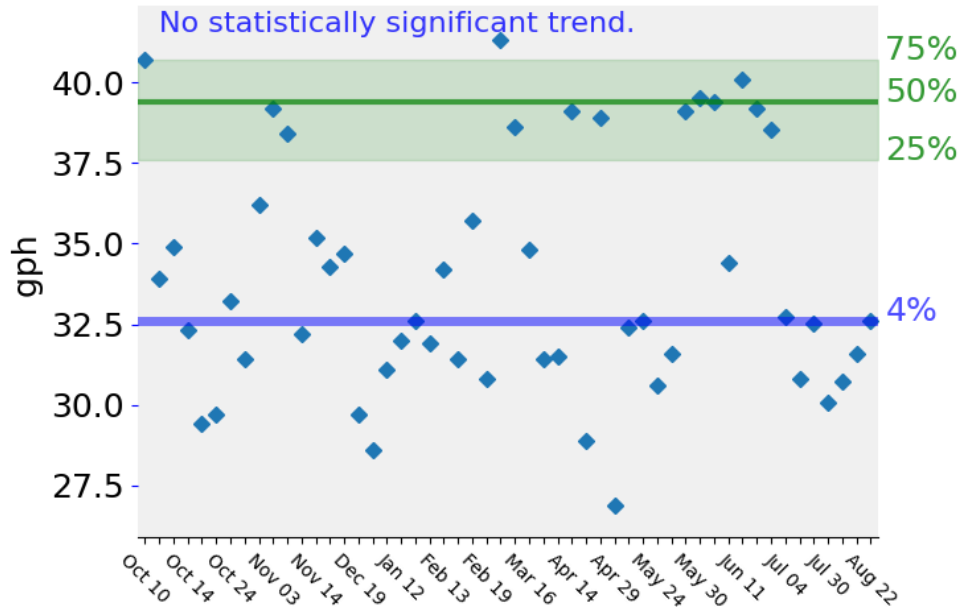


### SAVVY SAYS...

Your maximum fuel flow is below average when compared with your cohort.

---

## MAXIMUM RPM DURING FLIGHT

Measures maximum rpm during flight, most likely during takeoff. Maximum permitted RPM is necessary for the engine to develop full rated power during takeoff and in initial climb.

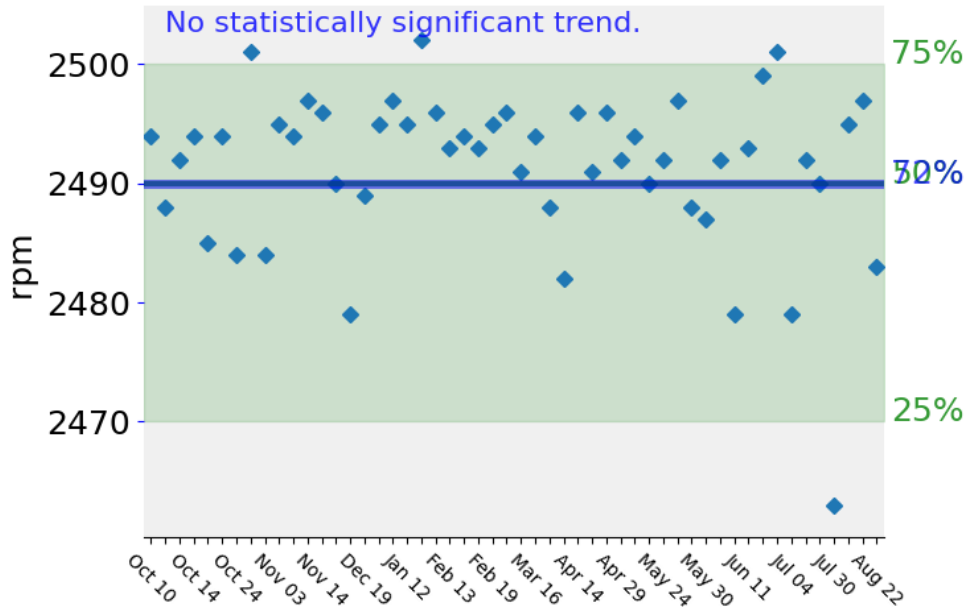


### SAVVY SAYS...

Your maximum RPM is higher than average when compared with your cohort.

## MAXIMUM MAP DURING FLIGHT

Measures maximum manifold pressure during flight, most likely during takeoff. Sufficient MAP, not to exceed redline, is necessary for the engine to develop full rated power during takeoff and initial climb

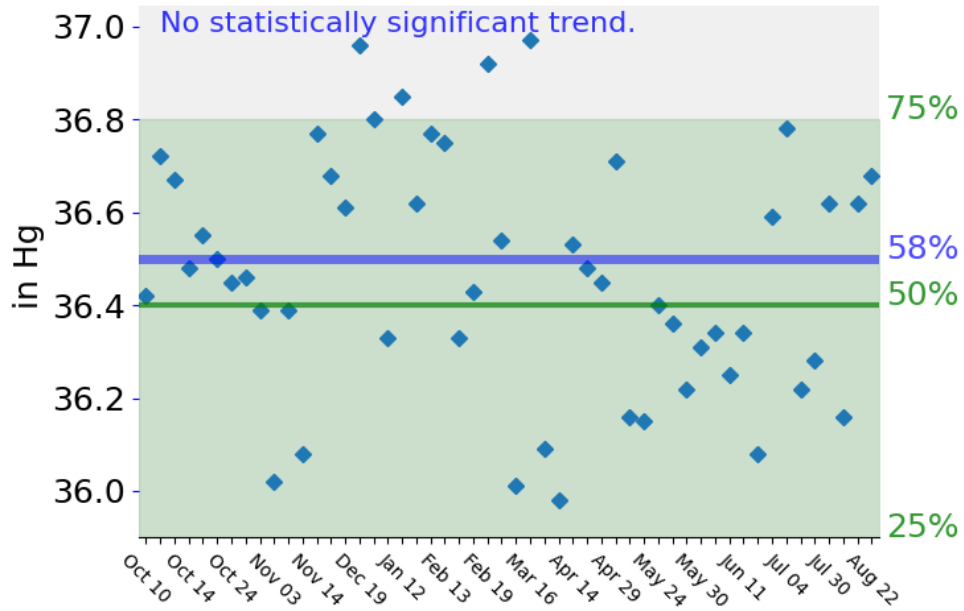


### SAVVY SAYS...

Your maximum MAP is average when compared with your cohort.

---

## INACTIVITY PERIODS (DAYS)

Measures the number of days your aircraft was inactive between flights. Inactivity can contribute to engine corrosion and reduced life of engine components.

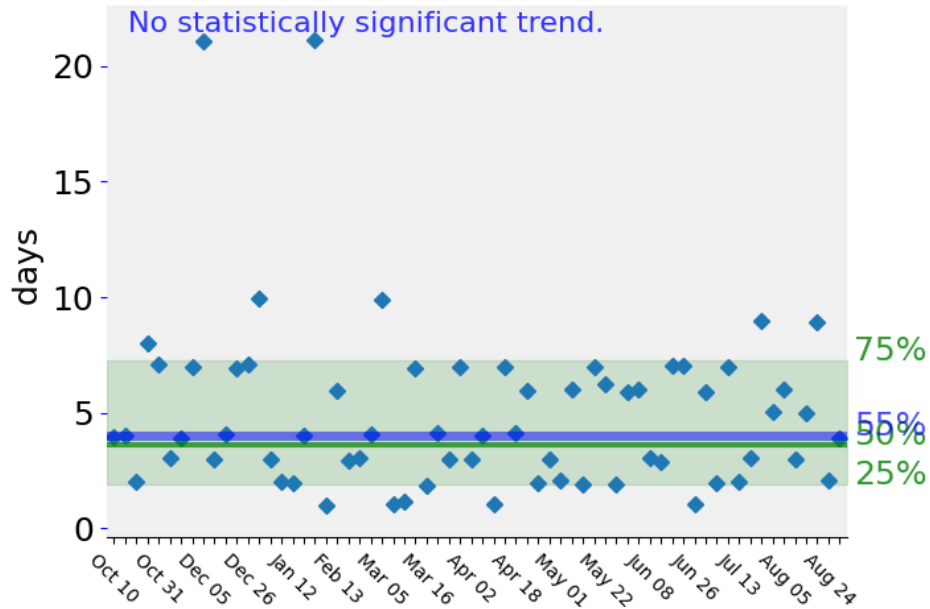

### SAVVY SAYS...

Your engine's inactivity is about average when compared to your cohort. Savvy recommends continuing to fly as frequently as possible

---

**For more information about the contents of this SavvyAnalysis Report Card and how to interpret it, see our [FAQ page](#). If you have questions or comments, please [let us know](#).**

Copyright Savvy Aviation, Inc. All rights reserved.